


NOTE:

1. AT PLANTING, PRUNE ONLY CROSSING LIMBS, CODOMINANT LEADERS, BROKEN OR DEAD BRANCHES, AND ANY BRANCHES THAT POSE A HAZARD TO PEDESTRIANS.
2. CENTER TRUNK OF TREE IN PIT. TRUNK MUST BE VERTICAL.
3. REMOVE ENTIRE WIRE BASKET AND BURLAP BEFORE PLANTING.
4. REMOVE GIRDLING ROOTS BEFORE PLANTING.
5. INSTALL WOODEN 2"x2" TREE STAKES AND PLASTIC TREE CHAIN TO STABILIZE TREE. STAKES TO BE UPRIGHT, WITH TOP OF STAKES BETWEEN 3-4 FEET ABOVE GROUND. PLASTIC TREE CHAIN TO BE APPROXIMATELY 6" FROM TOP OF STAKES AND PLACED PARALLEL TO GROUND.
6. THE DEPTH OF MULCH MUST BE 2-3 INCHES.
7. INSTALL SHREDDED VIRGINIA FINE PINE MULCH, UNLESS DESIGNATED OTHERWISE BY CITY ARBORIST. MULCHING SHALL BE IN ACCORDANCE WITH CITY OF FREDERICKSBURG MULCHING STANDARDS.
8. BACKFILL WITH NATIVE SOIL UNLESS SPECIFIED OTHERWISE BY CITY ARBORIST.
9. ALL TREES ON PUBLIC STREETS AND PUBLIC PROPERTY SHALL BE ON THE CURRENT VERSION OF THE APPROVED CITY OF FREDERICKSBURG TREE LIST.

10. ALL TREES PROPOSED BY A LANDSCAPE PLAN FOR PUBLIC STREETS AND PUBLIC PROPERTY SHALL BE REVIEWED FOR APPROPRIATENESS BY A CERTIFIED ARBORIST PRIOR TO INSTALLATION.
11. WIDTH OF PLANTING HOLE SHALL BE 1.5 TIMES THE DIAMETER OF THE ROOT BALL.
12. SOIL ON TOP OF ROOT BALLS MUST BE REMOVED TO EXPOSE THE ROOT FLARE (I.E. TOP STRUCTURAL ROOT). SOIL ABOVE THE ROOT FLARE SHALL NOT BE INCLUDED IN ROOT BALL DEPTH MEASUREMENT.
13. BOTTOM OF ROOT BALL SHALL SET ON COMPACTED OR UNDISTURBED SOIL.
14. ANGLE TOP OF HOLES FOR ADDITIONAL WIDTH.
15. ALL TREES SHALL HAVE A SLOW RELEASE WATERING BAG SYSTEM INSTALLED AND DEVELOPER SHALL BE RESPONSIBLE FOR WATERING TREES FOR FIRST GROWING SEASON UNLESS APPROVED OTHERWISE BY THE CITY.
16. REFERENCE FOR TREE PLANTING STANDARD PRACTICES: ANSI A300 (PART 6), CURRENT VERSION.
17. TREE GUARDS TO BE INSTALLED AT BASE OF ALL NEW TREES AT TIME OF PLANTING. MUST USE ARBOGARD OR SUITABLE REPLACEMENT APPROVED BY THE CITY ARBORIST.

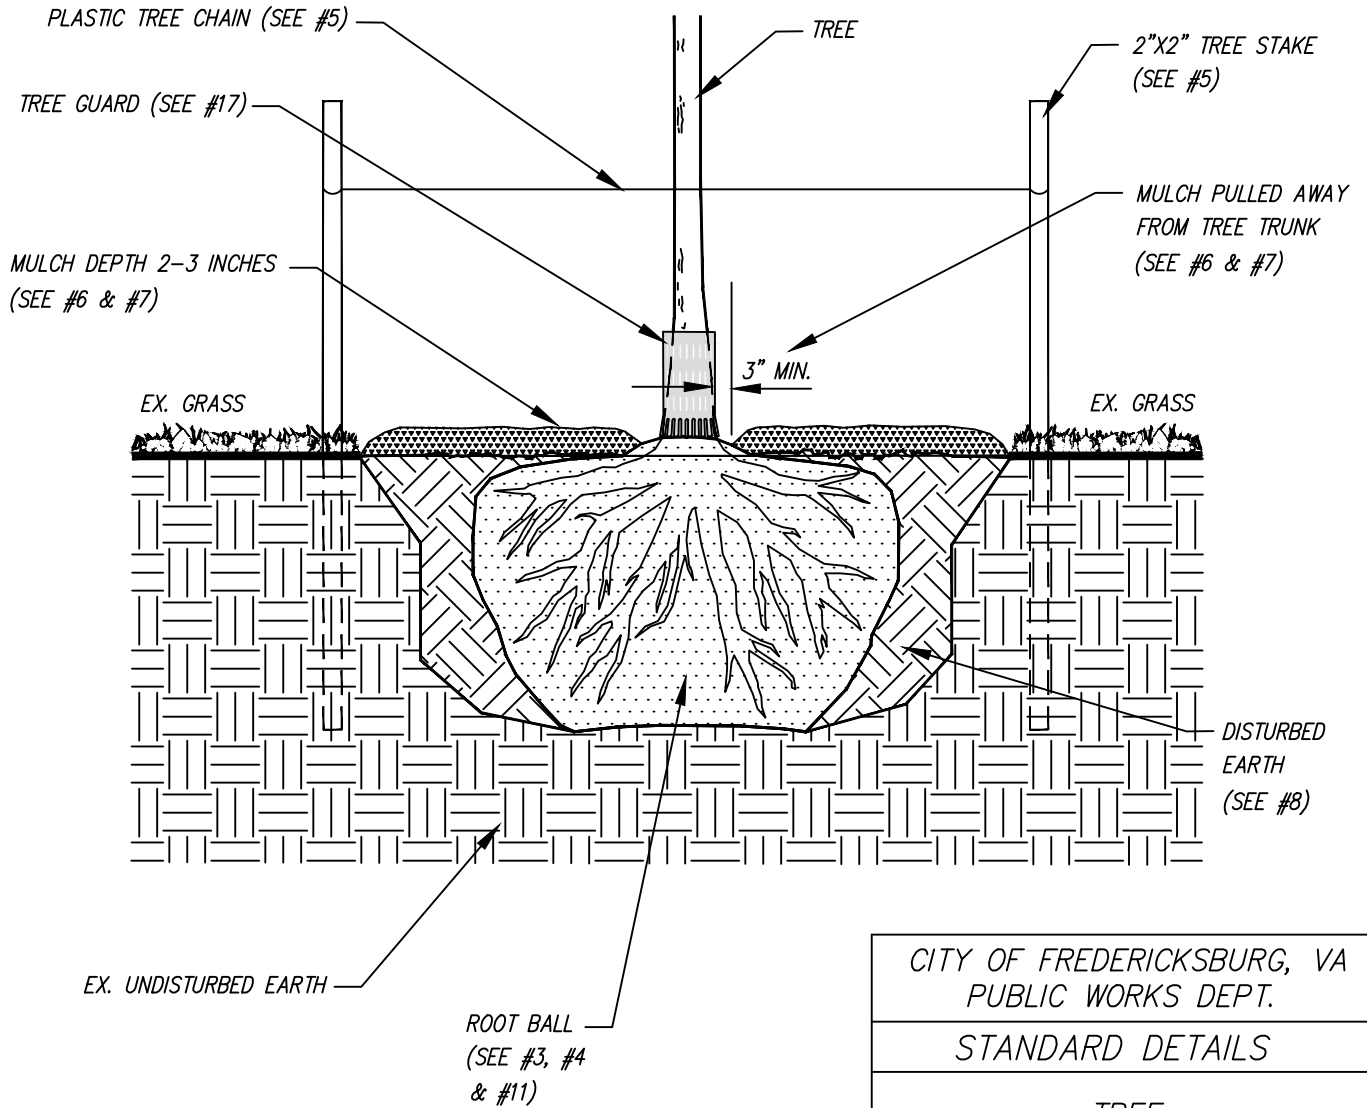

CITY OF FREDERICKSBURG, VA
PUBLIC WORKS DEPT.

STANDARD DETAILS

TREE
PLANTING & MULCHING
FOR GRASSY AREAS

NOVEMBER 2013

T3